



Digital monitoring relay for residual current monitoring (with current transformer 3UL23) Setting range 0.03...40 A separate for warning threshold and switch-off value supply voltage 24 ... 240 V AC/DC, 50 .. 60Hz ON delay and tripping delay 0.1 to 20 s Shutdown hysteresis up to 50% Warning hysteresis 5% fixed Width 22.5 mm, 2 change-over contacts with or without fault buffer screw terminal

Product brand name	SIRIUS
Product designation	Residual current monitoring relay with digital setting
Product type designation	3UG4
General technical data	
Product function	for three-phase supplies
Design of the display	LCD
Insulation voltage	
• rated value	300 V
• for overvoltage category III according to IEC 60664	
— with degree of pollution 3 rated value	300 V
Degree of pollution	3
Type of voltage	
• of the control supply voltage	AC/DC
Surge voltage resistance rated value	4 kV
Protection class IP	IP20
• of the enclosure	IP20
• of the terminal	IP20
Shock resistance	

<ul style="list-style-type: none"> • acc. to IEC 60068-2-27 	sinusoidal half-wave 15g / 11 ms
Vibration resistance	
<ul style="list-style-type: none"> • acc. to IEC 60068-2-6 	1 ... 6 Hz: 15 mm, 6 ... 500 Hz: 2g
Mechanical service life (switching cycles)	
<ul style="list-style-type: none"> • typical 	10 000 000
Electrical endurance (switching cycles)	
<ul style="list-style-type: none"> • at AC-15 at 230 V typical 	100 000
Thermal current of the switching element with contacts maximum	5 A
Reference code acc. to DIN EN 81346-2	K
Relative repeat accuracy	1 %

Product Function

Product function	
<ul style="list-style-type: none"> • difference current indication 	Yes
<ul style="list-style-type: none"> • Fault storage 	Yes
<ul style="list-style-type: none"> • Overcurrent detection 1 phase 	Yes
<ul style="list-style-type: none"> • undercurrent detection 1 phase 	No
<ul style="list-style-type: none"> • Adjustable open/closed-circuit current principle 	Yes
<ul style="list-style-type: none"> • External reset 	Yes

Control circuit/ Control

Control supply voltage at AC	
<ul style="list-style-type: none"> • at 50 Hz rated value 	24 ... 240 V
<ul style="list-style-type: none"> • at 60 Hz rated value 	24 ... 240 V
Control supply voltage at DC	
<ul style="list-style-type: none"> • rated value 	24 ... 240 V
Operating range factor control supply voltage rated value at DC	
<ul style="list-style-type: none"> • initial value 	0.85
<ul style="list-style-type: none"> • Full-scale value 	1.1
Operating range factor control supply voltage rated value at AC at 50 Hz	
<ul style="list-style-type: none"> • initial value 	0.85
<ul style="list-style-type: none"> • Full-scale value 	1.1
Operating range factor control supply voltage rated value at AC at 60 Hz	
<ul style="list-style-type: none"> • initial value 	0.85
<ul style="list-style-type: none"> • Full-scale value 	1.1

Measuring circuit

Type of current for monitoring	AC
Measurable current	10 mA ... 43 A
Measurable line frequency	16 ... 400 Hz
Adjustable operating delay time	0.1 ... 20 s

Adjustable pick-up value current	
• 1	30 mA ... 40 A
• 2	30 mA ... 40 A
Adjustable response delay time	0 ... 20 s
Adjustable response delay time	
• when starting	0.1 ... 20 s
Buffering time in the event of power failure minimum	10 ms
Accuracy of digital display	+/-1 digit

Precision

Relative metering precision	5 %
Temperature drift per °C	0.1 %/°C

Auxiliary circuit

Number of NC contacts for auxiliary contacts	0
Number of NC contacts	
• delayed switching	0
Number of NO contacts for auxiliary contacts	0
Number of NO contacts	
• delayed switching	0
Number of CO contacts	
• for auxiliary contacts	2
• delayed switching	2
Operating frequency with 3RT2 contactor maximum	5 000 1/h

Main circuit

Type of voltage	AC/DC
Operating voltage	
• rated value	24 ... 240 V
Operating frequency rated value	16 ... 400 Hz

Outputs

Ampacity of the output relay at AC-15	
• at 250 V at 50/60 Hz	3 A
• at 400 V at 50/60 Hz	0 A
Ampacity of the output relay at DC-13	
• at 24 V	1 A
• at 125 V	0.2 A
• at 250 V	0.1 A
Operating current at 17 V minimum	5 mA
Continuous current of the DIAZED fuse link of the output relay	4 A

Electromagnetic compatibility

Conducted interference	
• due to burst acc. to IEC 61000-4-4	2 kV

<ul style="list-style-type: none"> • due to conductor-earth surge acc. to IEC 61000-4-5 	2 kV
<ul style="list-style-type: none"> • due to conductor-conductor surge acc. to IEC 61000-4-5 	1 kV
Field-bound parasitic coupling acc. to IEC 61000-4-3	10 V/m
Electrostatic discharge acc. to IEC 61000-4-2	4 kV contact discharge / 8 kV air discharge

Galvanic isolation	
Design of the electrical isolation	galvanic isolation
Galvanic isolation	
<ul style="list-style-type: none"> • between entrance and outlet 	Yes
<ul style="list-style-type: none"> • between the outputs 	Yes
<ul style="list-style-type: none"> • between the voltage supply and other circuits 	No

Connections/ Terminals	
Product function	
<ul style="list-style-type: none"> • removable terminal for auxiliary and control circuit 	Yes
Type of electrical connection	screw-type terminals
Type of connectable conductor cross-sections	
<ul style="list-style-type: none"> • solid 	1x (0.5 ... 4.0 mm ²), 2x (0.5 ... 2.5 mm ²)
<ul style="list-style-type: none"> • finely stranded with core end processing 	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.5 mm ²)
<ul style="list-style-type: none"> • at AWG conductors solid 	2x (20 ... 14)
<ul style="list-style-type: none"> • at AWG conductors stranded 	2x (20 ... 14)
Connectable conductor cross-section	
<ul style="list-style-type: none"> • solid 	0.5 ... 4 mm ²
<ul style="list-style-type: none"> • finely stranded with core end processing 	0.5 ... 2.5 mm ²
AWG number as coded connectable conductor cross section	
<ul style="list-style-type: none"> • solid 	20 ... 14
<ul style="list-style-type: none"> • stranded 	20 ... 14
Tightening torque	
<ul style="list-style-type: none"> • with screw-type terminals 	0.8 ... 1.2 N·m






Installation/ mounting/ dimensions	
Mounting position	any
Mounting type	screw and snap-on mounting onto 35 mm standard mounting rail
Height	102 mm
Width	22.5 mm
Depth	91 mm
Required spacing	
<ul style="list-style-type: none"> • with side-by-side mounting <ul style="list-style-type: none"> — forwards — Backwards — upwards 	0 mm 0 mm 0 mm

- downwards 0 mm
- at the side 0 mm
- for grounded parts
 - forwards 0 mm
 - Backwards 0 mm
 - upwards 0 mm
 - at the side 0 mm
 - downwards 0 mm
- for live parts
 - forwards 0 mm
 - Backwards 0 mm
 - upwards 0 mm
 - downwards 0 mm
 - at the side 0 mm

Ambient conditions

Installation altitude at height above sea level	
• maximum	2 000 m
Ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-40 ... +85 °C
• during transport	-40 ... +85 °C

Certificates/ approvals

General Product Approval	EMC	Declaration of Conformity	Test Certificates
 UL	 EAC	 RCM	 EG-Konf.
			Miscellaneous Type Test Certificates/Test Report
Test Certificates	Marine / Shipping	other	Railway
Special Test Certificate	 DNV-GL DNVGL.COM/AF	Confirmation	Vibration and Shock

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UG4625-1CW30>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3UG4625-1CW30>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3UG4625-1CW30>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3UG4625-1CW30&lang=en




\fArial Unicode MS|b0|i0|c0|p34;C2



\fArial Unicode MS|b0|i0|c0|p34;\H0.7x;\H1.4286x;A1+\H1.4286x;




\fArial Unicode MS|b0|i0|c0|p34;SIEMENS\H0.7x;
\fArial Unicode MS|b0|i0|c0|p34;\H0.7x;SIRIUS\H1.4286x;



\fArial Unicode MS|b0|i0|c0|p34;<0,5s \fWingdings 3|b0|i0|c2|p18;\H1.0833x;g\fArial Unicode MS|b0|i0|c0|p34;\H0.7x;

\fArial Unicode MS|b0|i0|c0|p34;>2,5s \fWingdings 3|b0|i0|c2|p18;\H1.0833x;g\fArial Unicode MS|b0|i0|c0|p34;\H0.7x;

\fArial Unicode MS|b0|i0|c0|p34;>2,5s \fWingdings 3|b0|i0|c2|p18;\H1.0833x;g\fArial Unicode MS|b0|i0|c0|p34;\H0.7x;



\fArial Unicode MS|b0|i0|c0|p34;3UG4625-1CW30




\fArial Unicode MS|b0|i0|c0|p34;14



\fArial Unicode MS|b0|i0|c0|p34;24

\fArial Unicode MS|b0|i0|c0|p34;SIEMENS

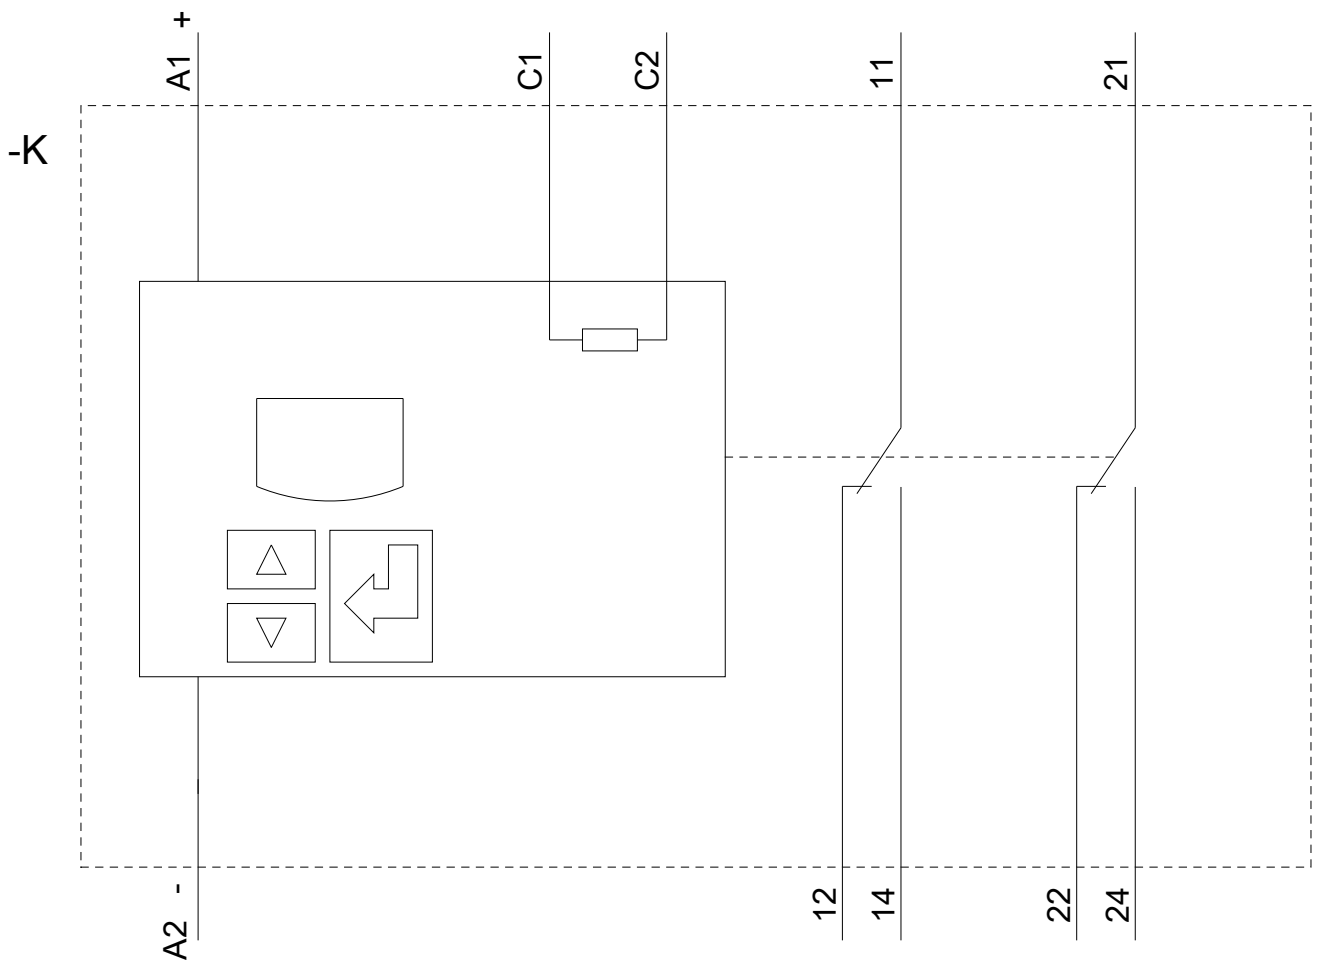

last modified:

05/07/2020